




4. Remove the factory grille. Open the hood and remove the hood release latch by removing two T15 screws. Remove the ten plastic clips holding the plastic shield located above the grille.



5. If vehicle is installed with a front camera, unhook the connector. The grille can then be removed by remove four 10mm bolts on top and four 10mm (two on each side) from the sides.

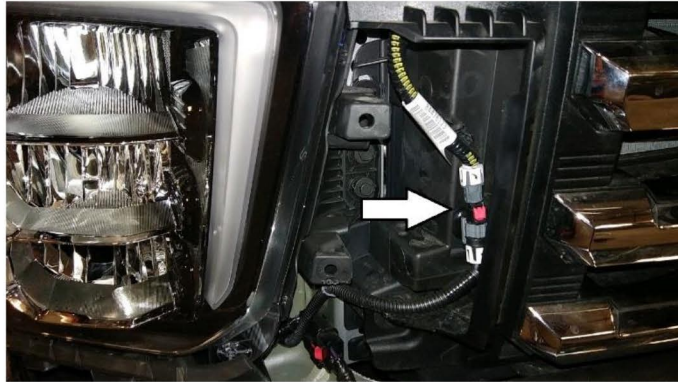

6. Remove the two 14mm bolts located on the back side of the bumper. Install the top brackets. Line the end up with the bottom brackets and tighten bolts.



7. Reinstall the grille and reconnect camera plug.
8. Reinstall plastic shield and hood release latch.
9. Reinstall the plastic side panel and inner fender well.
10. Install the grill guard by using the 1/2" carriage bolts, washers and lock nuts provided.